

# RPS/DPS 8000


## High Accuracy Resonant Pressure Sensor

Since 1972, Druck has manufactured precision pressure sensors with a capability to meet critical applications in industrial, aerospace, oil and gas, and research environments. Today, Druck is part of Baker Hughes and has continually worked to develop and improve on the performance of our pressure sensors to meet our customers' requirements.

The RPS/DPS 8000 is the first product to incorporate the exciting new TERPS technology. TERPS is a resonant silicon pressure sensor technology platform that provides an order of magnitude greater accuracy and stability than current pressure measurement technologies. The new TERPS technology also extends the pressure range capability to high pressures and, by incorporating true pressure media isolation, greatly improves its suitability for use in harsh environments.

In addition to providing the performance and packaging improvements available with TERPS, the RPS/DPS 8000 product line takes advantage of best practices to offer a wide range of pressure and electrical connections to enable a level of customization for your specific requirements never before available in the performance class of this sensor.

The combination of the power of the TERPS technology and the quality, reliability and flexibility of the RPS/DPS 8000 Series offers a truly unique solution for high accuracy and high stability pressure measurement requirements.

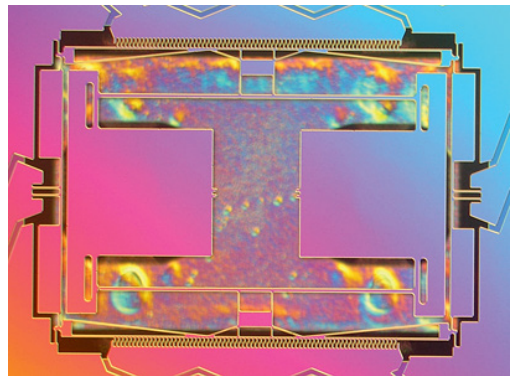

### Features:

- High Precision,  $\pm 0.01\%$  FS over compensated temperature range
- High Stability,  $\pm 100$  ppm FS/year
- Wide temperature range, up to  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  ( $-40^{\circ}$  to  $257^{\circ}\text{F}$ )
- Media isolated construction, suitable for use in harsh environments
- Multiple Output configurations, RS-232, RS-485, USB 2.0, CAN Bus, Frequency & Diode (TTL)
- Wide selection of pressure & electrical connections to suit specific requirements

# Specifications

## Measurement

### Base Pressure Ranges

- 0 to 2 bar (0 to 29 psi) absolute
- 0 to 7 bar (0 to 101 psi) absolute
- 0 to 14 bar (0 to 203 psi) absolute
- 0 to 20 bar (0 to 290 psi) absolute
- 0 to 35 bar (0 to 507 psi) absolute
- 0 to 70 bar (0 to 1015 psi) absolute
- 0 to 100 bar (0 to 1450 psi) absolute
- 0 to 200 bar (0 to 2900 psi) absolute

### Calibrated Ranges

Any zero-based range between 1 and 200 bar (14.5 to 2900 psi) can be specified. (Performance will be of the full scale of the base pressure range selected.) Barometric ranges are available in the RPS/DPS 8100 series. The lowest calibrated pressure is 35 mbar absolute.

### Overpressure

1.5X FS

### Sensor Failure Pressure

2.0X FS

### Pressure Containment

- Ranges to 7 bar (100 psi), 70 bar (1,000 psi)
- Ranges to 100 bar (1,000 psi), 200 bar (3,000 psi)
- Ranges to 200 bar (3,000 psi), 700 bar (10,000 psi)

### Supply and Output

| Electronics Option | Supply Voltage (V DC) | Output                                   | Current Consumption <sup>(2)</sup> (mA) |
|--------------------|-----------------------|--|---|
| 1                  | 6 to 28               | Frequency & Diode TTL <sup>(1,3,4)</sup> | 3.5                                     |
| A                  | 7 to 28               | RS485                                    | 16.5 quiescent, 32 max                  |
| B                  | 7 to 28               | RS232                                    | 16.5 quiescent, 32 max                  |
| C                  | 7.5 to 30             | CAN Bus                                  | 25 quiescent, 32 max                    |
| U                  | 4.8 to 5.2            | USB 2.0                                  | 40 quiescent, 100 max                   |

1. Jitter less than 20 ns
2. Full temperature range
3. Square wave pressure signal, 25 kHz nominal, 4–10 kHz span
4. Forward voltage diode, 0.5 to 0.7 V @ 25°C (77°F), typically –2 mV/°C nominal

### Response Time

< 300 msec for pressure change from 10% to 90% FS

### Supply Response

TTL: Accurate to specification within 500 ms of power up, over all operating temperatures

RS232/RS485/CAN Bus/USB: Accurate to specification within 10 min of power-up

### Electrical Protection

RS232/485/CAN Bus/TTL: Connecting Vsupply and GND between any combinations of pins on the connector will not damage the unit

### Insulation

RS232/485/CAN Bus/TTL:

> 100 Mohm @ 500 Vdc between all pins and case.

## Performance

There are two levels of performance specification:

- Standard
- Improved

Specifications include combined effects of non-linearity, hysteresis, repeatability and temperature errors over the compensated temperature range, and over the base pressure range of 35 mbar to the full scale pressure.

| Accuracy Code | Precision |
|---------------|-----------|
| A1- Standard  | 0.02% FS  |
| A2- Improved  | 0.01% FS  |

- For Frequency & Diode output, the above accuracies are achievable by using a polynomial curve fit algorithm and coefficient data supplied with sensor.
- Sensors are calibrated against standards traceable to UKAS operating to better than 100 ppm.

### Compensated Temperature Ranges:

There are three compensated temperature ranges available:

- –10 to +50°C
- –40 to +85°C
- –40 to +125°C (TTL and CAN bus only)

### Temperature Effects

All temperature effects are included in the accuracy statement.

### Long Term Stability

Standard: ±0.02% FS/annum

Improved: ±0.01% FS/annum

*Note: Unless otherwise specified, specifications are at the reference conditions of 25°C (77°F) ±5°C (±9°F) and 1 bar (14 psi).*

### Orientation (g) Sensitivity

Less than 0.2 mbar/g

## Physical Specifications

### Storage Temperature Range

As compensated temperature range.

### Operating Temperature Range

As compensated temperature range.

### Pressure Media

Fluids compatible with 316L stainless steel and Hastelloy C276

### Ingress Protection

See Electrical Connector section

### Vibration

BS EN 60068-2-6 (2008) Sine sweeps 5 Hz to 2 kHz, levels to 20g<sub>n</sub>

BS EN 60068-2-64 random 10 Hz to 2kHz to 4gn RMS for 1 hour each axis

Less than 0.02% FS effect at any time

### Shock

DO-160E 9 (Figure 7.2) 20 g<sub>n</sub> 11 ms terminal saw-tooth profile

### Humidity

MIL-STD-810D Method 507.2 Procedure III (Aggravated humidity environment, 65°C, 95% RH)

### Pressure Connector

Available Options are:


- G1/4 Female\*
- G1/4 Male Flat
- G1/4 Male 60° Internal Cone
- G1/8 Male 60° Internal Cone
- 1/4 NPT Female\*
- 1/4 NPT Male
- 1/8 NPT Male
- M20 x 1.5 Male (3mm bore)
- M14 x 1.5 60° Internal Cone
- M12 x 1 Internal Cone
- 7/16-20 UNF Male 74° External Cone
- G1/2 Male\*
- G1/4 Quick Connect
- 1/2 NPT Male
- G1/4 Male Flat Long
- 7/16-20 UNF Female
- Depth Cone (G1/4 Female)
- 7/16-20 UNF Male Short Flat
- 3/8-24 UNJF
- 1/4 VCR Female
- 1/4 VCR Male\*

\* choose one of these connectors for pressure ranges above 100 bar.

Other pressure connectors may be available. Contact Baker Hughes to discuss your requirement.

Please ensure that only the intended sealing face is used when mounting the sensor. Failure to comply with this requirement may affect performance or calibration accuracy.

Male threaded pressure connectors must not be sealed or constrained against the face at the base of the thread. The forward cone or flat face should always be used, as indicated below.

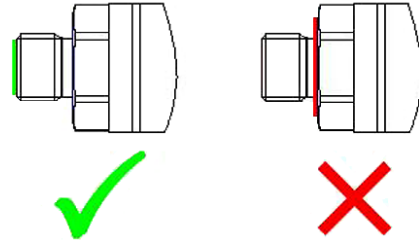

### Electrical Connector

| Code No. | Description         | Max Operating Temp. Range |             | IP Rating |
|----------|---------------------|---------------------------|-------------|-----------|
|          |                     | °C                        | °F          |           |
| 0        | No Connector        | -55 to +125               | -67 to +257 | -         |
| 1        | Cable Gland         | -40 to +80                | -40 to +176 | 65        |
| 2        | Raychem Cable       | -55 to +125               | -67 to +257 | 65        |
| 3        | Polyurethane Depth  | -40 to +80                | -40 to +176 | 68        |
| 4        | Hytrek Depth        | -40 to +80                | -40 to +176 | 68        |
| 6        | Bayonet MIL-C-26482 | -55 to +125               | -67 to +257 | *         |
| C        | 1/2 NPT Conduit     | -40 to +80                | -40 to +176 | 67        |
| G        | M12 X 15-pin        | -55 to +125               | -67 to +257 | *         |
| H        | PTFE Cable (Orange) | -55 to +125               | -67 to +257 | 54        |
| M        | Micro USB socket    | -40 to +85                | -40 to +185 | -         |

\* Hermetically sealed connectors with a maximum leak rate of  $1 \times 10^{-6}$  cc/s at 1 atmosphere. High IP rated mating connectors are available.

### Certifications

- CE Marked
- RoHS
- EMC Standards:
  - BS EN 61000-6-1: 2007, Susceptibility - Light Industrial.
  - BS EN 61000-6-2: 2005, Susceptibility - Heavy Industrial.
  - BS EN 61000-6-3: 2007, Emissions - Light Industrial.
  - BS EN 61000-6-4: 2007, Emissions - Heavy Industrial.
  - BS EN 61326-1: 2013, Electrical Equipment for Measurement, Control and Laboratory Use - EMC requirements.
  - BS EN 61326-2-3: 2013 Requirements for pressure transducers.

# Connection Details

| Option       | Code | Connection | Function          |                |                 |                   |
|--------------|------|------------|-------------------|----------------|-----------------|-------------------|
|              |      |            | Frequency & Diode | Digital- RS485 | Digital - RS232 | Digital - CAN Bus |
| Flying Leads | 0    | RED        | SUPPLY +VE        | SUPPLY +VE     | SUPPLY +VE      | SUPPLY +VE        |
|              |      | YELLOW     | FREQ              | RS485 B        | Rx              | CAN Hi            |
|              |      | GREEN      | +VE TEMP          | RS485 A        | Tx              | CAN Lo            |
|              |      | BLUE       | GROUND            | GROUND         | GROUND          | SUPPLY -VE        |
|              |      | BLACK      | -VE TEMP          | -              | -               | CAN 0V            |
|              |      | ORANGE     | EEPROM            | -              | -               | -                 |

| Option | Code | Connection | Function          |                |                 |                    |
|--------|------|------------|-------------------|----------------|-----------------|--------------------|
|        |      |            | Frequency & Diode | Digital- RS485 | Digital - RS232 | Digital - CAN Bus  |
| MI2    | G    | 1          | SUPPLY +VE        | SUPPLY +VE     | SUPPLY +VE      | N/C                |
|        |      | 2          | FREQ              | RS485 B        | Rx              | SUPPLY +VE         |
|        |      | 3          | GROUND            | GROUND         | GROUND          | SUPPLY -VE /CAN 0V |
|        |      | 4          | +VE TEMP          | RS485 A        | Tx              | CAN HI             |
|        |      | 5          | EEPROM            | -              | -               | CAN LO             |

| Option | Code       | Connection | Function          |                |                 |                   |
|--------|------------|------------|-------------------|----------------|-----------------|-------------------|
|        |            |            | Frequency & Diode | Digital- RS485 | Digital - RS232 | Digital - CAN Bus |
| CABLE  | 1, 3, 4, C | RED        | SUPPLY +VE        | SUPPLY +VE     | SUPPLY +VE      | SUPPLY +VE        |
|        |            | YELLOW     | FREQ              | RS485 B        | Rx              | CAN Hi            |
|        |            | BLUE       | +VE TEMP          | RS485 A        | Tx              | CAN Lo            |
|        |            | WHITE      | GROUND            | GROUND         | GROUND          | SUPPLY -VE        |
|        |            | BLACK      | -VE TEMP          | -              | -               | CAN 0V            |
|        |            | ORANGE     | EEPROM            | -              | -               | -                 |
|        |            | SCREEN     | -                 | -              | -               | -                 |

| Option | Code | Connection | Function          |                |                 |                   |
|--------|------|------------|-------------------|----------------|-----------------|-------------------|
|        |      |            | Frequency & Diode | Digital- RS485 | Digital - RS232 | Digital - CAN Bus |
| PTFE   | H    | RED        | SUPPLY +VE        | SUPPLY +VE     | SUPPLY +VE      | SUPPLY +VE        |
|        |      | YELLOW     | FREQ              | RS485 B        | Rx              | CAN Hi            |
|        |      | GREEN      | +VE TEMP          | RS485 A        | Tx              | CAN Lo            |
|        |      | BLUE       | GROUND            | GROUND         | GROUND          | SUPPLY -VE        |
|        |      | BLACK      | EEPROM            | -              | -               | -                 |
|        |      | WHITE      | -VE TEMP          | -              | -               | CAN 0V            |
|        |      | SCREEN     | CASE              | CASE           | CASE            | CASE              |

| Option  | Code | Connection | Function          |                |                 |                    |
|---------|------|------------|-------------------|----------------|-----------------|--------------------|
|         |      |            | Frequency & Diode | Digital- RS485 | Digital - RS232 | Digital - CAN Bus  |
| RAYCHEM | 2    | RED        | SUPPLY +VE        | SUPPLY +VE     | SUPPLY +VE      | SUPPLY +VE         |
|         |      | WHITE      | FREQ              | RS485 B        | Rx              | CAN Hi             |
|         |      | GREEN      | +VE TEMP          | RS485 A        | Tx              | CAN Lo             |
|         |      | BLUE       | GROUND            | GROUND         | GROUND          | SUPPLY -VE /CAN 0V |
|         |      | BLACK      | EEPROM            | -              | -               | -                  |
|         |      | SCREEN     | -                 | -              | -               | -                  |















| Option    | Code | Connection | Function          |                |                 |                   |
|-----------|------|------------|-------------------|----------------|-----------------|-------------------|
|           |      |            | Frequency & Diode | Digital- RS485 | Digital - RS232 | Digital - CAN Bus |
| Micro-USB | M    | 1          | -                 | -              | +5 V            | -                 |
|           |      | 2          | -                 | -              | D-VE            | -                 |
|           |      | 3          | -                 | -              | D+VE            | -                 |
|           |      | 4          | -                 | -              | ID              | -                 |
|           |      | 5          | -                 | -              | GROUND          | -                 |

| Option | Code | Connection | Function          |                |                 |                   |
|--------|------|------------|-------------------|----------------|-----------------|-------------------|
|        |      |            | Frequency & Diode | Digital- RS485 | Digital - RS232 | Digital - CAN Bus |
| MIL-C  | 6    | A          | SUPPLY +VE        | SUPPLY +VE     | SUPPLY +VE      | SUPPLY +VE        |
|        |      | B          | FREQ              | RS485 B        | Rx              | CAN Hi            |
|        |      | C          | +VE TEMP          | RS485 A        | Tx              | CAN Lo            |
|        |      | D          | GROUND            | GROUND         | GROUND          | SUPPLY -VE        |
|        |      | E          | EEPROM            | -              | -               | -                 |
|        |      | F          | -VE TEMP          | -              | -               | CAN 0V            |

|                          | Frequency & Diode | Digital- RS232 | Digital - RS485 | CAN Bus | USB*1 |
|--------------------------|-------------------|----------------|-----------------|---------|-------|
| Maximum Cable length (m) | 10                | 10             | 1000            | 1000    | 2     |

**Note\*1:** Cable not provided with USB option.

# Dimensional Drawings

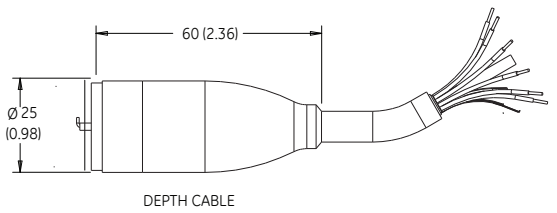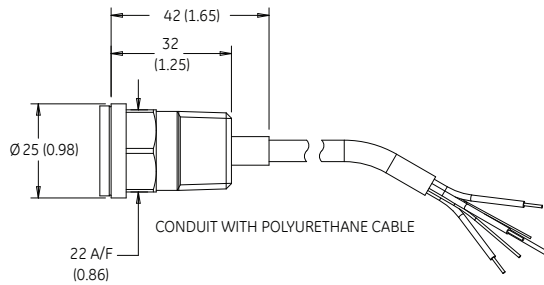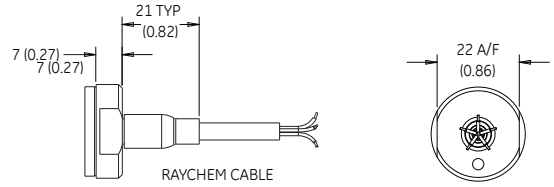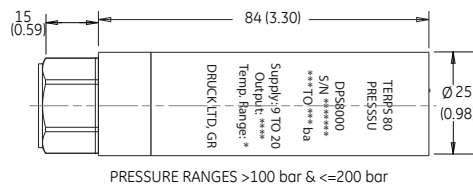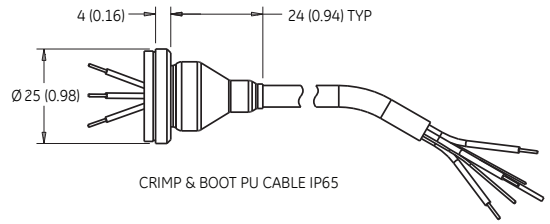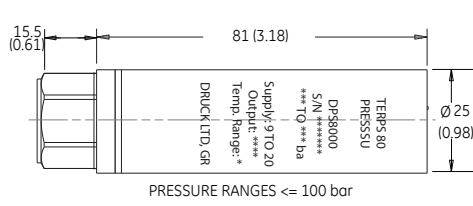

## Notes:

1. All dimensions are nominal lengths and are subject to change.
2. All dimensions are in millimeters (inches).
3. Other pressure and electrical connectors may be available, please contact Druck.

# Ordering Information

## (1) Select model code

### Main Product Variant

**RPS** Resonant Pressure Sensor – Frequency & Diode Output **(Note 1)**

**DPS** Digital Pressure Sensor – Digital Output **(Note 1)**

### Diameter, Material and Isolation

**80** 25mm Stainless Steel Oil isolated

### Electrical Connector

**0** No Electrical Connector (Flying leads)

**1** Polyurethane Cable IP65

**2** Raychem Cable

**3** Polyurethane Cable (Depth) IP68

**4** Hytrel Cable (Depth) IP68

**6** MIL-C-26482 (6-pin Shell Size 10)

**C** 1/2" NPT Conduit with Polyurethane Cable (Non-Exd Only)

**G** M12x1 5-Pin

**H** Orange PTFE Cable

**M** Micro USB socket **(Note 3)**

### Output Option **(Note 6)**

**1** Frequency & Diode (TTL)

**A** RS485

**B** RS232

**C** CAN Bus

**U** USB 2.0 **(Note 4)**

### Compensated Temperature Range

**TA** -10 to +50 °C

**TB** -40 to +85 °C

**TC** -40 to +125 °C **(Note 2)**

### Accuracy

**A1 - Standard** 0.02%

**A2 - Improved** 0.01%

### Calibration

**CC** Full Thermal Calibration

### Hazardous Area Approval

**H0** None

### Pressure Connector

**PA** G1/4 Female **(Note 5)**

**PB** G1/4 Male Flat

**PC** G1/4 Male 60° internal Cone

**PD** G1/8 Male 60° internal Cone

**PE** 1/4 NPT Female **(Note 5)**

**PF** 1/4 NPT Male

**PG** 1/8 NPT Male

**PH** M20x1.5

**PJ** M14x1.5 60° Internal Cone

**PK** M12x1 Internal Cone

**PL** 7/16-20 UNJF Male 74 degree external cone

**PN** G1/2 Male

**PQ** G1/4 Quick Connect

**PR** 1/2 NPT Male

**PT** G1/4 Male Flat Long

**PV** 7/16-20 UNF Female)

**PW** Depth Cone (G1/4 Female)

**PX** 7/16-20 UNF Male Flat

**PY** 3/8-24 UNJF

**RA** 1/4 VCR Female

**RF** 1/4 VCR Male **(Note 5)**

**RPS 80 4 1 - TA - A2 - CC - H0 - PA [Typical Model Code]**

**Note 1:** RPS variants require Output Option Code '1'. DPS variants require Output Option Code 'A', 'B', 'C' or 'U'.

**Note 2:** Requires Output Option Code '1' or 'C' and Electrical Connector Codes '0', '2', '6', 'G', or 'H'.

**Note 3:** Only available with USB output option.

**Note 4:** Only available with micro USB socket connector.

**Note 5:** Choose one of these connectors for pressure ranges above 100 bar..

## Ordering Information (cont.)

### 2) State pressure range and units (e.g., 0 to 20 bar, 0 to 100 psi):

#### Unit options are:

| Symbol              | Description     |
|---------------------|-----------------|
| bar                 | bar             |
| mbar                | millibar        |
| psi                 | pounds/sq. inch |
| Pa                  | Pascal          |
| hPa                 | hectoPascal     |
| kPa                 | kiloPascal      |
| MPa                 | megaPascal      |
| mmH <sub>2</sub> O  | mm water        |
| cmH <sub>2</sub> O  | cm water        |
| mH <sub>2</sub> O   | metres water    |
| inH <sub>2</sub> O  | inches water    |
| ftH <sub>2</sub> O  | feet water      |
| mmHg                | mm mercury      |
| inHg                | inches mercury  |
| kgf/cm <sup>2</sup> | kg force/sq. cm |
| atm                 | atmosphere      |
| Torr                | torr            |

### 3) State cable lengths and units e.g., 1 m cable, 3 ft cable (only required on certain electrical connectors):

**Note 6:** Maximum Cable length: (1) Frequency & Diode - 10 m, (A) RS485 - 1000 m, (B) RS232 - 10 m, (C) CAN Bus - 1000 m. Integer values only, e.g. 1m (3 ft) cable. Minimum cable length is 1m (3 ft) if cable is supplied.

#### Typical order examples:

RPS 8011-TA-A1-CC-H0-PA, 0-7 bara, 5 m cable

DPS 806A-TB-A2-CC-H0-PL, 0-1,000 psia

[Druck.com](https://www.druck.com)

© Copyright 2020. Baker Hughes Company. This material contains one or more registered trademark of Baker Hughes Company and its subsidiaries in one or more countries. All third-party product and company names are trademarks of their respective holders.

920-519K

